

Volume 23.2
Valid July 1st - December 31st, 2023



E.M. PRECISE TOOL LTD.



Eclipse Measurement continues to introduce innovations in inspection and measurement with new highly engineered systems designed to increase accuracy, decrease measurement time, and automate record keeping.

We offer solutions for all your measurement challenges. Call us today with your measurement needs, 1-800-260-2124.

www.bowersgroup.co.uk/ca

Sylvac SCAN S25T

Fast, Accurate, Reliable & Repeatable!



Features:

- · Ideal for small cylindrical parts
- Measuring range: 1.02"/26mm Diameter, 7.87"/200mm Length
- High resolution and high accuracy
- · One-click rapid measuring
- 30° tilting optics for complete thread measurements

Part No. 54-902-025-5

Sylvac SCAN F60T

For Larger Parts!



Features:

- Complete 2D part scan in less than 3 seconds
- Measuring range: 2.3"/60mm diameter, 12"/300mm length
- Reduce inspection time & scrap, Increase productivity
- · High resolution and high accuracy
- · One-click rapid measuring
- 30° tilting optics for complete thread measurements

Part No. 54-902-406-5



Features:

- 11.8"/300mm x 11.8"/300mm x 7.8"/200mm XYZ stage
- Teach and repeat programming with Fowler FUSION
- . 6.5:1 zoom optics (with optional CNC control)
- High resolution 0.5µm scales for increased accuracy



Part No. VI-3030-Touch-XT



Baty R400FT2-E Optical Comparator

Features:

- 16"/400mm screen
- Optical Edge Sensor combined with Fowler FUSION software makes for the most functional, user-friendly comparator on the market
- · Additional accessories available

Part No. R400FT2-E



Part No. 54-950-001-0

Horizontal Setting and Calibration

Setting of measuring equipment with variable dimensions.

Trimos THV Horizontal



Part No. THV.0-50

Features:

- For the calibration of rings, plugs and multiple gauges up to 4"
- · Small, portable, versatile and accurate
- Ultra precise
- Meets ISO 9000 requirements

Trimos HS6

Features:

- For setting equipment with variable dimensions quickly and accurately
- Available in sizes up to 120"
- Large selection of accessories to handle any job



Part No. HS6-500

Trimos A-Line Portable Measuring Arms

- Portable, take measurements right in the machine center
- Used for inspection in aerospace, automotive, and construction
- · Easy to use FUSION software
- Up to 7-axis configuration
- Many probe and laser scanning head options available
- · Sizes up to 30 feet





Ultraliftplus

The World's Safest Lifter

Lifts up to 4400lbs (flat), 1760lbs (round)

- 3 Safety Features:
- Locking switch mechanism
- Unique 'Safety Shim': pre-test any load to ensure a 3:1 safety factor
- Locking eye mechanism: magnet cannot be switched off while holding a load





The patented 'safety shim' allows pre-testing of the load to be lifted, irrespective of weight, material type, material thickness and surface condition. If the load passes a 3:1 safety factor is guaranteed.

| Part No. | Self Weight (lbs) | Material Length Max (inches) | SWL (lbs) | Thickness Min (inches) | Rour SWL (Ibs) | Diameter Max (inches) | List Price |
|----------|-------------------------|------------------------------------|--------------|------------------------|----------------------|-----------------------|------------|
| UL0275+ | 8.8 | 60 | 275 | 0.8 | 110 | 8 | \$783.07 |
| UL0550+ | 24.2 | 60 | 550 | 1.0 | 220 | 12 | \$1,509.49 |
| UL1100+ | 59.4 | 80 | 1100 | 1.2 | 440 | 16 | \$2,121.07 |
| UL2200+ | 138.6 | 120 | 2200 | 1.8 | 880 | 18 | \$3,800.75 |
| UL4400+ | 345.4 | 120 | 4400 | 2.8 | 1760 | 24 | \$5,482.56 |

UltraliftLM
Safe, General-Purpose Lifting
Lifts up to 4400lbs (flat), 1760lbs (round)

· Locking switch handle mechanism









Complete Bases & Stands

Features:

- Solid holding of precision measuring equipment
- For use in measurement, inspection, and positioning of workpieces with dial indicators
- All stands will clamp onto curved and flat surfaces, with the exception of E909 (flat only)

















E906







| Part No. (NA Part No.) | Base Part No. | Switching Type | Fitment Part No. | Fitment Type | Hold (lbs) | List Price |
|---------------------------|-----------------|----------------|---------------------|---------------------------------|------------|------------|
| E901 (E901) | E901WF | Push Button | RP991BL | Heavy duty with fine adjustment | 176 | \$438.28 |
| E903CP (E903CP) | E900WF | Push Button | RP72CP | Light duty | 66 | \$251.96 |
| E905 (M19713ASS) | E905WF (M15885) | Lever | RP995BL | Heavy duty | 176 | \$62.67 |
| E906 (M19712ASS) | E905WF (M15885) | Lever | RP991BL | Heavy duty with fine adjustment | 176 | \$66.59 |
| E910 (E910) | E905WF (M15885) | Lever | RP999 | Mechanical one piece | 176 | \$131.35 |
| E909 (E909) | 834 | Non-switchable | RP909FIT | One pillar | 31 | \$48.08 |
| 1 | | | | | | |

Quick Holding Clamp Switchable

Features:

- ON/OFF switches
- The fast and easy way to hold metal workpieces at 45°, 90°
- Turn the magnet OFF or at the midpoint position when setting up, turn ON when you're ready to work
- · Fast and safe set-up!
- Ideal for round and square tubing, angle, and flat stock
- · Simple wipe clean design



| Part No. | Angles | Dimensions (inches) | Pull Force (lbs) | List Price |
|----------|----------|---------------------|------------------|------------|
| QHCSS | 45°, 90° | 4.37 x 3.74 x 1.14 | 88 | \$121.77 |
| QHCSL | 45°, 90° | 5.98 x 5.12 x 1.38 | 165 | \$200.94 |
| | | | | |

90° Fixed Welding Clamps Switchable

Features:

- · Convenience of ON/OFF switches
- Two ON/OFF switches for independent operation
- · Easy and safe set-up!
- Machined flat and V-surfaces are ideal for round and square tubing, angle, and flat stock
- Heavy duty construction



| Part No. | Angles | Dimensions (inches) | Pull Force (lbs) | List Price |
|----------|--------|---------------------|------------------|------------|
| FWCSS | 90° | 5.98 x 5.98 x 1.50 | 121 | \$200.94 |
| FWCSL | 90° | 7.76 x 7.76 x 1.89 | 265 | \$669.99 |
| | | | | |

Inside and Outside Welding Clamps

- Hold and position sheet metal, round pipes, square, angled, or flat stock
- Constructed from two independent rectangular magnets for consistent, undiminished magnetic force when both sides are attached to workpieces
- Use mounting holes to link two magnets together for use as fixturing elements
- Use hex hole on magnet for breakaway leverage



| Part No. | Angles | Height (inches) | Width (inches) | Thickness (inches) | Pull Force (lbs) | List Price |
|----------|---------------|-----------------|----------------|--------------------|------------------|------------|
| IOWCC* | 30°, 60°, 90° | 2.97 | 2.05 | 0.55 | 20 | \$83.95 |
| | 30°, 60°, 90° | 4.92 | 3.35 | 0.71 | 33 | |
| IOWCL | 30°, 60°, 90° | 6.50 | 4.33 | 0.79 | 40 | \$68.68 |

^{*}Pack includes 2 clamps

Bowers Bore Gauging



XTH3 Bluetooth Holematic Pistol Grips

Have a long run of a single part? The XTH3 is the fastest, most consistent hole measurement system available world wide!



Pistol grip design significantly decreases measuring time and guarantees repeatability.



Systems



XTD3 Bluetooth Electronic Holemikes

Designed to measure hard to reach bores.

Measure cylinder bores, high accuracy bearings,
grooves, threads and much more!





Special application headsContact the Eclipse Sales Department 1-800-260-2124














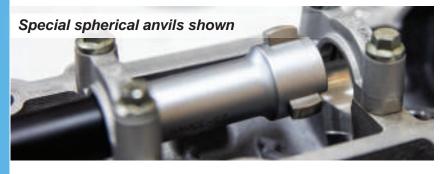

| Part No. | Range | Includes | List Price | Sale Price | | | | |
|----------------------|----------------------------------|----------------------------|------------|------------|--|--|--|--|
| Pistol Grip Individu | Pistol Grip Individual Sets | | | | | | | |
| XTH20i-BT | 0.750" - 1"/20 - 25mm | 1 head, 1 handle, 1 ring | \$2,799.54 | \$2,519.59 | | | | |
| XTH25i-BT | 1" - 1.375"/25 - 35mm | 1 head, 1 handle, 1 ring | \$3,026.14 | \$2,723.53 | | | | |
| XTH35i-BT | 1.375" - 2"/35 - 50mm | 1 head, 1 handle, 1 ring | \$3,208.45 | \$2,887.61 | | | | |
| Pistol Grip Comple | | | | | | | | |
| SXTH1i-BT | 0.080" - 0.250"/2 - 6mm (2 pt.) | 5 heads, 1 handle, 3 rings | \$7,432.48 | \$6,689.23 | | | | |
| SXTH3i-BT | 0.250" - 0.375"/6- 10mm | 2 heads, 1 handle, 1 ring | \$2,833.53 | \$2,550.18 | | | | |
| SXTH4i-BT | 0.375" - 0.750"/10 - 20mm | 3 heads, 1 handle, 2 rings | \$3,344.41 | \$3,009.97 | | | | |
| SXTH5i-BT | 0.750" - 2"/20 - 50mm | 3 heads, 1 handle, 2 rings | \$4,309.52 | \$3,878.57 | | | | |
| SXTH6i-BT | 2" - 4"/50 - 100mm | 3 heads, 1 handle, 2 rings | \$4,820.40 | \$4,338.36 | | | | |
| SXTH7i-BT | 4" - 6"/100 - 150mm | 2 heads, 1 handle, 1 ring | \$4,309.52 | \$3,878.57 | | | | |
| SXTH8i-BT | 6" - 8"/150 - 200mm | 2 heads, 1 handle, 1 ring | \$5,785.51 | \$5,206.96 | | | | |
| SXTH9i-BT | 4" - 8"/100 - 200mm | 4 heads, 1 handle, 2 rings | \$9,249.40 | \$8,324.46 | | | | |
| SXTH11i-BT | 0.750" - 4"/20 - 100mm | 6 heads, 1 handle, 4 rings | \$7,204.85 | \$6,484.37 | | | | |
| SXTH10i-BT | 0.250" - 0.750"/6 - 20mm | 5 heads, 1 handle, 3 rings | \$3,968.59 | \$3,571.73 | | | | |
| Connectivity Cable | s/Accessory | | | | | | | |
| 926.6721.10 | Proximity cable with USB conne | ection | \$231.75 | \$220.16 | | | | |
| 926.6723 | Proximity cable with serial conn | nection | \$231.75 | \$220.16 | | | | |
| 981.7100 | USB bluetooth receiver | | \$148.32 | \$140.90 | | | | |
| | | | | | | | | |

operate with either style handle







Bowers Bore Gauging Sets

The best solution for measuring multiple size bores.

2" - 4" Set



SXTH6i-BT

3/8" - 3/4" Set



SXTD4i-BT







Both styles feature:

- Coolant proof, dust proof IP67
- Resolution: 0.00005"/0.001mm
- Bluetooth connectivity to your phone or tablet
- Self centering 3 point heads above 0.250"
- Tungsten carbide measuring faces on all 3-point heads from 0.5"/12.5mm and up
- Sizes over 0.500"/12.5mm feature blind bore capability
- · Includes UKAS certificates for all pistol grip, heads and rings

| Part No. | Range | Includes | List Price | Sale Price |
|------------------|-----------------------------------|----------------------------|------------|------------|
| Holemike Compl | ete Sets (Traditional style) | | | |
| SXTD1i-BT | 0.080" - 0.250"/2 - 6mm (2 pt.) | 5 heads, 1 handle, 3 rings | \$6,807.27 | \$6,126.54 |
| SXTD3i-BT | 0.250" - 0.375"/6- 10mm | 2 heads, 1 handle, 1 ring | \$2,719.20 | \$2,447.28 |
| SXTD4i-BT | 0.375" - 0.750"/10 - 20mm | 3 heads, 1 handle, 2 rings | \$3,287.76 | \$2,958.98 |
| SXTD5i-BT | 0.750" - 2"/20 - 50mm | 3 heads, 1 handle, 2 rings | \$4,536.12 | \$4,082.51 |
| SXTD6i-BT | 2" - 4"/50 - 100mm | 3 heads, 1 handle, 2 rings | \$4,990.35 | \$4,491.32 |
| SXTD7i-BT | 4" - 6"/100 - 150mm | 2 heads, 1 handle, 1 ring | \$4,196.22 | \$3,776.60 |
| SXTD8i-BT | 6" - 8"/150 - 200mm | 2 heads, 1 handle, 1 ring | \$5,615.56 | \$5,054.00 |
| SXTD9i-BT | 4" - 8"/100 - 200mm | 4 heads, 1 handle, 2 rings | \$8,965.12 | \$8,068.61 |
| Connectivity Cab | oles/Accessory | | | |
| 926.6721.10 | Proximity cable with USB conne | ection | \$231.75 | \$220.16 |
| 926.6723 | Proximity cable with serial conne | ection | \$231.75 | \$220.16 |
| 981.7100 | USB bluetooth receiver | | \$148.32 | \$140.90 |

Bowers XT Holematic Groove Sets

General sizes available.



Features:

- · Coolant proof, dust proof IP67
- · Pistol grip handle for FAST measurements
- Resolution: 0.00005"/.001mm, direct in/mm conversion
- · Error free bluetooth data transfer
- Includes depth stops and UKAS certified setting rings
- Special sizes, profiles and depth extensions available to measure any bore feature

| Part No. | Sizes Included | Anvil Step Height | Anvil Contact Width | List Price | Sale Price |
|-------------------|---|--|--|------------|------------|
| SP-SXTH10I-BT-GRO | 1/4" - 5/16" 5/16" - 3/8" 3/8" - 1/2" 1/2" - 5/8" 5/8" - 3/4" | 0.049" 0.049" 0.059" 0.079" 0.098" | 0.059" 0.059" 0.059" 0.059" 0.059" | \$7,810.00 | \$7,029.00 |
| SP-SXTH5I-BT-GRO | 3/4" - 1" 1" - 1-3/8" 1-3/8" - 2" | 0.108" 0.217" 0.157" | 0.079" 0.079" 0.079" | \$6,492.40 | \$5,843.16 |
| SP-SXTH6I-BT-GRO | 2" - 2-5/8" 2-5/8" - 3-1/4" 3-1/4" - 4" | 0.315" 0.315" 0.413" | 0.118" 0.118" 0.118" | \$7,249.60 | \$6,524.64 |

Bowers MicroGauge


Pocket sized 2-point bore gauging system.







- System range: 0.040" 0.250"/1 6mm
- Switchable resolution 0.0005", 0.00005"/0.01, 0.001, 0.0005mm
- Repeatability: 0.00005"/0.001mm
- · Sets include setting rings with UKAS certificates
- Depth stops available, call our technical department 1-800-788-2353



Bowers Ultima Bore Gauging System

World's most accurate system!

D62S

Features:

Display not included

• Accuracies of 0.00004" up to 1.97"

 Ceramic anvils with blind bore capabilities above 0.472"

Uses compact, multi function Sylvac display

| Part No. | Description | Set Includes | List Price | Sale Price |
|------------------|-----------------------------|---------------------------------|-------------|-------------|
| USET2DW | 0.078" - 0.236"/2 - 6mm | Includes: handle, rings & heads | \$9,246.01 | \$8,321.41 |
| USET3DW | 0.236" - 0.393"/6 - 10mm | Includes: handle, rings & heads | \$5,021.81 | \$4,519.63 |
| USET4DW | 0.393" - 0.787"/10 - 20mm | Includes: handle, rings & heads | \$6,740.91 | \$6,066.82 |
| USET7DW | 0.236" - 0.787"/6 - 20mm | Includes: handle, rings & heads | \$8,456.15 | \$7,610.54 |
| USET8DW | 0.787" - 1.97"/20 - 50mm | Includes: handle, rings & heads | \$9,276.97 | \$8,349.27 |
| USET9DW | 1.97" - 3.94"/50 - 100mm | Includes: handle, rings & heads | \$10,299.16 | \$9,269.25 |
| USET10DW | 0.787" - 3.94"/20 - 100mm | Includes: handle, rings & heads | \$15,773.97 | \$14,196.58 |
| Digital Displays | | | | |
| 804.1062 | Sylvac D62S Digital Display | | \$1,734.52 | \$1,647.79 |
| 804.1063.10 | Sylvac D62S Advanced Digit | tal Display | \$2,567.79 | \$2,439.40 |
| | | | | |

XT-Series Holemikes



- 3-pt contact with tungsten carbide measuring anvils above 0.5"
- Blind bore measuring heads featured above 0.5"
- Ratchet stop for consistent measuring
- Extensions available for deep measuring
- Includes UKAS certificates for all Holemikes and setting rings





| | | | Meas. | Ring | Ring | List | Sale |
|----------|-----------------|------------|-----------------------------|-------|----------|------------|------------|
| Part No. | Range | Grads. | Accuracy | Depth | Included | Price | Price |
| MXTA6I | 0.250" - 0.312" | 0.00025" | 0.00015" | 2.28" | 0.312" | \$623.00 | \$560.70 |
| MXTA8I | 0.312" - 0.375" | 0.00025" | 0.00015" | 2.28" | 0.312" | \$579.00 | \$521.10 |
| MXTA10I | 0.375" - 0.500" | 0.00025" | 0.00015" | 2.28" | 0.5" | \$579.00 | \$521.10 |
| MXTA12I | 0.500" - 0.625" | 0.00025" | 0.00015" | 2.44" | 0.5" | \$579.00 | \$521.10 |
| MXTA16I | 0.625" - 0.750" | 0.00025" | 0.00015" | 2.44" | 0.75" | \$584.00 | \$525.60 |
| XTA20I | 0.750" - 1" | 0.00025" | 0.00015" | 2.60" | 0.75" | \$664.35 | \$597.92 |
| XTA25I | 1" - 1.375" | 0.00025" | 0.00015" | 2.60" | 1.375" | \$948.63 | \$853.77 |
| XTA35I | 1.375" - 2" | 0.00025" | 0.00015" | 3.15" | 1.375" | \$965.11 | \$868.60 |
| XTA50I | 2" - 2.625" | 0.00025" | 0.0002" | 3.15" | 2.625" | \$1,158.75 | \$1,042.88 |
| XTA65I | 2.625" - 3.250" | 0.00025" | 0.0002" | 3.15" | 2.625" | \$1,158.75 | \$1,042.88 |
| XTA80I | 3.250" - 4" | 0.00025" | 0.0002" | 3.94" | 3.25" | \$1,470.84 | \$1,323.76 |
| Sets | | | | | | | |
| SMXTA2I | 0.250" - 0.375" | 2 heads, 2 | handles, 1 ring | | | \$3,685.34 | \$3,316.81 |
| SMXTA4I | 0.375" - 0.750" | 3 heads, 3 | 3 heads, 3 handles, 2 rings | | | | \$1,446.12 |
| SXTA5I | 0.750" - 2" | 3 heads, 3 | 3 heads, 3 handles, 2 rings | | | | \$2,284.13 |
| SXTA6I | 2" - 4" | 3 heads, 3 | handles, 2 ring | IS . | | \$3,401.06 | \$3,060.95 |
| | | | | | | | |

Sylvac S_Cal EVO **Electronic Calipers**



Features:

- · IP67 protected against fluid and dust
- · Available with or without Bluetooth
- · Heavy duty frame
- Extra large display
- Available with ISO Cert
- 12"/300mm is supplied without depth rod









| Part No. | Range | Accuracy | Resolution | List Price | Sale Price | | |
|---------------------|----------------|-------------------------|----------------|------------|------------|--|--|
| Without Data Output | | | | | | | |
| 810.1502.10 | 6"/150mm | 0.0008"/20µm | 0.0005"/0.01mm | \$231.75 | \$220.16 | | |
| 810.1522.10 | 8"/200mm | 0.0012"/30µm | 0.0005"/0.01mm | \$371.83 | \$353.24 | | |
| 810.1532.10 | 12"/300mm | 0.0012"/30µm | 0.0005"/0.01mm | \$505.73 | \$480.44 | | |
| Bluetooth Models | | | | | | | |
| 810.1506.10 | 6"/150mm | 0.0008"/20µm | 0.0005"/0.01mm | \$434.66 | \$412.93 | | |
| 810.1526.10 | 8"/200mm | 0.0012"/30µm | 0.0005"/0.01mm | \$654.05 | \$621.35 | | |
| 810.1536.10 | 12"/300mm | 0.0012"/30µm | 0.0005"/0.01mm | \$808.55 | \$768.12 | | |
| Accessories | | | | | | | |
| 981.7132 | Sylcom Basic D | ata Processing Software | \$1,056.78 | \$1,003.94 | | | |
| 981.7100 | USB bluetooth | receiver | | \$148.32 | \$140.90 | | |

Sylvac S Cal EVO **Proximity Electronic Calipers**



- · IP67 protected against fluid and dust
- · Ultra-Cal VI technology with proximity cable data output
- · Heavy duty frame
- Extra large display
- 12"/300mm is supplied without depth rod







| Part No. | Range | Accuracy | Resolution | List Price | Sale Price |
|------------------|-----------------|------------------------|----------------|------------|------------|
| 810.1702.10 | 6"/150mm | 0.0008"/20µm | 0.0005"/0.01mm | \$280.16 | \$266.15 |
| 810.1722.10 | 8"/200mm | 0.0012"/30µm | 0.0005"/0.01mm | \$462.47 | \$439.35 |
| 810.1732.10 | 12"/300mm | 0.0012"/30µm | 0.0005"/0.01mm | \$591.22 | \$561.66 |
| Connectivity Cab | les/Accessories | | | | |
| 981.7132 | Sylcom Basic Da | ata Processing Softwa | are | \$1,056.78 | \$1,003.94 |
| 926.6721.10 | Proximity cable | with USB connection | \$231.75 | \$220.16 | |
| 926.6723 | Proximity cable | with serial connection | \$231.75 | \$220.16 | |
| | | | | | |

Rapid-Mic Quick-Displacement Electronic Micrometers

Fastest micrometer on the market!









- Features:
- · IP67 protected against fluid and dust
- Non-rotating spindle with 0.39"/10mm travel per thimble rotation
- · Adjustable measuring force, 5N/10N (803.0300.10 and 803.0306.10 only)
- · Menu customizable with free software
- · Larger sizes and specialty anvil micrometers also available

| Part No. | Range | Accuracy | List Price | Sale Price |
|------------------|----------------------------------|------------------|------------|------------|
| 803.0300.10 | 0 - 1.18"/0 - 30mm | 0.00012"/0.003mm | \$660.23 | \$627.22 |
| 903.0600.10 | 1.18" - 2.6"/30 - 66mm | 0.00016"/0.004mm | \$1,007.34 | \$956.97 |
| 903.1000.10 | 2.6" - 4.0"/66 - 102mm | 0.00020"/0.005mm | \$1,275.14 | \$1,211.38 |
| Set | | | | |
| 903.1300.10 | 0 - 4"/0 - 102mm | | \$3,015.84 | \$2,865.05 |
| Bluetooth Models | 6 | | | |
| 803.0306.10 | 0 - 1.18"/0 - 30mm | 0.00012"/0.003mm | \$885.80 | \$841.51 |
| 903.0606.10 | 1.18" - 2.6"/30 - 66mm | 0.00016"/0.004mm | \$1,230.85 | \$1,169.31 |
| 903.1006.10 | 2.6" - 4.0"/66 - 102mm | 0.00020"/0.005mm | \$1,504.83 | \$1,429.59 |
| Bluetooth Set | | | | |
| 903.1306.10 | 0 - 4"/0 - 102mm | | \$3,637.96 | \$3,456.06 |
| Connectivity Cab | les/Accessory | | | |
| 981.7132 | Sylcom Basic Data Processing | Software | \$1,056.78 | \$1,003.94 |
| 926.6721.10 | Proximity cable with USB conne | ection | \$231.75 | \$220.16 |
| 926.6723 | Proximity cable with serial conr | nection | \$231.75 | \$220.16 |
| 981.7100 | USB Bluetooth receiver | | \$148.32 | \$140.90 |
| | | | | |
| | | | | |

DigiMiC Electronic Micrometer

The NEW world standard of precision with IP67 and Bluetooth®.









- · IP67 protected against fluid and dust
- Very High Accuracy: 0.00008"/0.002mm (0-1"/25mm)
- · Bluetooth IOT ready, no dongle or cable required for SPC data collection
- Super large display (0.460"/11.75mm)
- · Carbide measuring surfaces, sleep and absolute modes
- · Larger sizes available



Part No. DM025



List Price \$774.00

5

Sylvac Electronic Indicators

Features:

- · IP54 protected against fluid and dust
- Repeatability: 2µm
- Output: Proximity/Power USB/RS232/digimatic/Wireless
- · Menus customizable with free software
- Wide range of functions (MIN/MAX/DELTA, TOL, Factor, Preset. Auto Off, etc)
- Bezel rotates 270°
- · Large display with LED tolerance indicators
- · Includes lug back









| Part No. | Range | Accuracy | Resolution | List Price | Sale Price |
|-------------|---------------------|------------------|------------------|------------|------------|
| 805.5201.10 | 0 - 0.500"/12.5mm | 0.0004"/0.01mm | 0.0005"/0.01mm | \$703.49 | \$668.32 |
| 805.5301.10 | 0 - 0.500"/12.5mm | 0.00012"/0.003mm | 0.00005"/0.001mm | \$878.59 | \$834.66 |
| 805.5401.10 | 0 - 1"/25mm | 0.0004"/0.01mm | 0.0005"/0.01mm | \$843.57 | \$801.39 |
| 805.5501.10 | 0 - 1"/25mm | 0.00016"/0.004mm | 0.00005"/0.001mm | \$1,018.67 | \$967.74 |
| | | | | | |
| 805.5621.10 | 0 - 2"/50mm | 0.00019"/0.005mm | 0.00005"/0.001mm | \$1,401.83 | \$1,331.74 |
| Bluetooth | | | | | |
| 805.6301.10 | 0 - 0.500"/12.5mm | 0.00012"/0.003mm | 0.00005"/0.001mm | \$1,019.70 | \$968.72 |
| 805.6501.10 | 0 - 1"/25mm | 0.00016"/0.004mm | 0.00005"/0.001mm | \$1,212.31 | \$1,151.69 |
| | | | | | |
| Accessories | | | | | |
| 981.7132 | Sylcom Basic Data I | \$1,056.78 | \$1,003.94 | | |
| 981.7100 | USB Bluetooth Rece | eiver | | \$148.32 | \$140.90 |

Sylvac Mini S Dial Indicators

Small in size BIG in features!

Features:

- Bluetooth connectivity to your phone or tablet
- · IP67 protected against fluid and dust
- All indicators feature 0.50"/12.5mm range
- Analog scale for reversal point indication, Min/Max, multiplication factor (Bluetooth® models only)
- 3/8" mounting diameter with 4-48 contact thread
- · Auto power off feature
- · Optional cable connectivity output










805.6525

805.4125



*Basic models feature only simple functions.



O

Sylvac Multimode Electronic **Test Indicators**

Features:

- · Bluetooth connectivity to your phone or tablet
- · IP65 protected against fluid and dust
- 4 measuring modes: Min, Max, TIR and Direct
- 4 measuring resolutions 0.00005"/0.001mm or 0.0005"/0.01mm
- 1-1/2" diameter dial face rotates a full 360°
- Analog scale for reversal point indication
- Meets or exceeds DIN/ISO Standards (Maximum error on 0.00005" scale at full range: 0.0004")











| Part No. | Range | Contact Point Length | List Price | Sale Price |
|-------------|-------------------------------|----------------------|------------|------------|
| 805.4321.10 | 0.030"/0.80mm | 1/2" | \$856.55 | \$813.72 |
| 805.4322.10 | 0.080"/2.0mm | 1-7/16" | \$969.64 | \$921.16 |
| 805.4323.10 | 0.030"/0.80mm 0.080"/2.0mm | 1/2" 1-7/16" | \$1,053.07 | \$1,000.42 |
| Accessories | | | | |
| 981.7132 | Sylcom Basic Data Pr | ocessing Software | \$1,056.78 | \$1,003.94 |
| 981.7100 | USB BT Receiver | · | \$148.32 | \$140.90 |

NEW S Depth Gauges

Perfect for measuring depths, groove widths, slot widths, recess heights, step heights and through holes.

Features:

Part No. 812,1601

812,1603

812.1605

- · IP67 protected against fluid and dust
- Bluetooth connectivity to your phone or tablet
- 3 measuring styles available
- 4"/100mm measuring base as standard
- Optional bases available for larger widths
- Extra large display
- Absolute measuring system







| Description | List Price | Sale Price |
|---|------------|------------|
| 8"/200mm Interchangeable Anvil Bluetooth Depth Gauge | \$1,237.03 | \$1,175.18 |
| 12"/300mm Interchangeable Anvil Bluetooth Depth Gauge | \$1,424.49 | \$1,353.27 |
| 19"/500mm Interchangeable Anvil Bluetooth Depth Gauge | \$1,826.19 | \$1,734.88 |
| 8"/200mm Standard Style Bluetooth Depth Gauge | \$1,118.58 | \$1,062.65 |
| 12"/300mm Standard Style Bluetooth Depth Gauge | \$1,273.08 | \$1,209.43 |

812,1611 8"/200mm Standard Style Bluetooth Depth Gauge 812.1613 12"/300mm Standard Style Bluetooth Depth Gaug 812.1615 19"/500mm Standard Style Bluetooth Depth Gauge \$1,685.08 \$1,600.83 812.1621 8"/200mm Rotary Pin Bluetooth Depth Gauge \$1,262,78 \$1,199,64 812.1623 12"/300mm Rotary Pin Bluetooth Depth Gauge \$1,424,49 \$1,353.27 812.1625 19"/500mm Rotary Pin Bluetooth Depth Gauge \$1,934.34 \$1,837.62



Sylvac Sylvac Hi_Cal V2 Electronic Height Gauges

For your finer, more delicate parts.

Features:

- · Bluetooth for quick, easy recorded measurements
- . Extra low measuring force, from 0.2N
- Measure internal and external diameters, centerlines, heights, widths, depths and MIN/MAX/TIR capability
- Excellent repeatability thanks to the motorized carriage
- · High reliability
- · Bluetooth, USB and RS232 data outputs
- Battery life: 40 hours rechargeable during operation
- · Touch sensitive probe speed for easy operation
- · Base with small footprint
- Includes: protective cover, charging set, ruby ball probe Ø3mm, setting gauge and calibration certificate



Accessory Probe Sets





930.2151



930.2150



| Part No. | Range | Accuracy | List Price | Sale Price |
|-------------|---------------------------|-------------------|------------|------------|
| 830.0156 | 6"/150mm | 0.00013"/0.0034mm | \$5,950.00 | \$5,652.50 |
| 830.0306 | 12"/300mm | 0.00016"/0.0042mm | \$6,300.00 | \$5,985.00 |
| 830.0456 | 18"/450mm | 0.00020"/0.005mm | \$7,350.00 | \$6,982.50 |
| Accessories | | | | |
| 930.2150 | Full Probe Accessory Set | | \$1,599.59 | \$1,519.61 |
| 930.2151 | Basic Probe Accessory Set | | \$910.52 | \$864.99 |
| | | | | |







830.0456

Trimos V3, V4, V5 & V7 Electronic Height Gauges

The Trimos V3, V4, V5 & V7 vertical measuring instruments have been developed for the most difficult shop floor environments. Manufactured in Switzerland, they guarantee precise and repeatable measurements with superior ease of use.

Features:

- · Industry leading software simplifies measuring tasks
- Electronically adjustable measuring force 0.75/1.5 (N)
- Lithium-ion rechargeable batteries last up to 40 hours
- · All adjustments possible without tools
- Cast iron base for optimal stability and rigidity
- Bluetooth transmitter available
- Dual probe holders (V4 V7)
- · Carriage displacement: Manual for V3 and V4 models

V5 includes selectable manual or motorized carriage displacement

 V7 features 2D measuring, parts programming, statistics, tablet style display, and higher resolution of 0.00001"/0.0001mm

V3-700

2.5 + L(mm)/300

28"/711mm

31.9"/812mm

0.00032"/0.008mm

- Measures heights, diameters, perpendicularity, centerlines, Min/Max/Delta
- Resolution: 0.00005"/0.001mm
- V3 V5: Repeatability (2s): 0.00008"/0.002mm (Ø 0.00016"/0.004mm)
- V7: Repeatability (2s): 0.00002"/0.0005mm (Ø 0.00004"/0.001mm)

V3-400

16"/407mm

20"/508mm

0.00028"/0.007mm

All models include:

- · Charging unit
- Measuring probe with ruby ball Ø4mm
- Probe holder elbow Ø 8mm
- · Setting gauge

Measuring Range

Range with Probe inverted

Max. Permissible Errors (µm)

May Pormissible Errors

V3

· User's manual and test certificate

| Frontal Squareness Deviation | 0.00028 /0.00711111 0.0004"/0.010mm | 0.00032 /0.006Hilli 0.0006"/0.015mm |
|------------------------------|--|--|
| Air Cushion | N | 0 |
| V4 | V4-400 | V4-700 |
| Measuring Range | 16"/407mm | 28"/711mm |
| Range with Probe inverted | 28.3"/719mm | 40.2"/1023mm |
| Max. Permissible Errors | 0.0002"/0.005mm | 0.00028"/0.007mm |
| Frontal Squareness Deviation | 0.0004"/0.010mm | 0.0006"/0.015mm |
| Air Cushion | YE | S |
| V5 | V5-400 | V5-700 |
| Measuring Range | 16"/407mm | 28"/711mm |
| Range with Probe inverted | 28 3"/719mm | 40.2"/1023mm |

| Frontal Squareness Deviation Air Cushion | 0.0002"/0.005mm |
|---|------------------|
| V7 | V7-700 |
| Measuring Range | 28"/711mm |
| Range with Probe inverted | 40"/1023mm |
| Max. Permissible Errors (µm) | 2.5 + L(mm)/400 |
| Frontal Squareness Deviation | 0.00032"/0.008mm |
| Air Cushion | YES |

EXTREMELY Easy to Use!







*Height Gauges available up to 40", 60", 80" upon request

| Part No. | Description F | Range | List Price | Sale Price |
|-------------|--|---|-------------|-------------|
| V3-400 | V3 Height Gauge 1 | 16"/407mm | \$5,450.84 | \$5,178.30 |
| V3-700 | V3 Height Gauge 2 | 28"/711mm | \$6,051.15 | \$5,748.59 |
| V4-400 | V4 Height Gauge 1 | 16"/407mm | \$6,795.54 | \$6,455.76 |
| V4-700 | V4 Height Gauge 2 | 28"/711mm | \$7,924.13 | \$7,527.92 |
| V5-400 | V5 Height Gauge 1 | 16"/407mm | \$7,443.88 | \$7,071.68 |
| V5-700 | V5 Height Gauge 2 | 28"/711mm | \$8,644.50 | \$8,212.28 |
| V7-700 | V7 Height Gauge 2 | 28"/711mm | \$12,486.50 | \$11,862.18 |
| Probe Sets | | | | |
| TA-SE-105 | 4mm Probe Set, 21 piece | | \$2,040.88 | \$1,938.84 |
| TA-SE-106 | 8mm Probe Set, 16 piece | 8mm Probe Set, 16 piece | | |
| TA-SE-107 | 8mm Basic Probe Set, 7 piece | 8mm Basic Probe Set, 7 piece | | |
| Accessories | | | | |
| TA-IH-127 | 12"/300mm Holder - for 8mm probes | 12"/300mm Holder - for 8mm probes | | |
| TA-EL-022 | Bluetooth transmitter (Not available for | Bluetooth transmitter (Not available for V3 models) | | |
| 981.7161.10 | Vmux software - for connecting multipl | le units to one PC | \$505.73 | \$480.44 |

Twin Beam Dial Height Gauges

Features:

- Separate digit counters register both upward & downward travel
- Zero setting can be obtained throughout the gauge's range
- Coarse readings in 0.100" graduations: fine readings taken on indicator are 0.001"
- · Dual chrome plated beams
- · Carbide-tipped scriber
- · Base is ground & lapped for maximum flatness



| Part No. | Range | Accuracy | List Price | Sale Priee |
|--------------|-------|-----------|------------|------------|
| 52-174-212-0 | 12" | ± 0.0015" | \$637.81 | \$578.95 |
| 52-174-224-0 | 24" | ± 0.002" | \$1,063.10 | \$967.41 |
| | | | | |

Twin Beam Electronic Height Gauges

Features:

- Range: 12"/300mm
- Accuracy: ± 0.0016"/0.04mm
- Updated electronic and mechanical design with offset scriber offers better accuracy and movement of carriage
- · Base is ground and lapped for maximum flatness
- · Handwheel provides course and fine movement
- Carbide tipped scriber
- Functions include preset, in/mm conversion and ABS/INC for direct or comparative measuring



Sale \$1,105,61

List Price \$1,214.97

Part No. 54-174-212-3



Electronic Height Gauges

Features:

- Base design has a more comfortable grip and is finely ground and lapped for smooth movement on surface plates
- Fine adjust feature allows precise adjustment to required settings
- Preset feature allows setting pre-determined or reference measurements
- Indicator holding bar included
- Resolution 0.0005"/0.01mm
- Large, high contrast LCD display
- · Coarse adjustment hand wheel
- Carriage locking lever
- · Carbide tipped scriber



| Part No. | Range | Accuracy | List Price | Salle Prilee |
|--------------|-----------|------------------|------------|--------------|
| 54-175-012-0 | 12"/300mm | ± 0.0015"/0.04mm | \$1,329.57 | \$1,196.61 |
| 54-175-018-0 | 18"/450mm | ± 0.002"/0.05mm | \$1,582.48 | \$1,424.23 |
| 54-175-024-0 | 24"/600mm | ± 0.002"/0.05mm | \$1,781.27 | \$1,620.95 |

Single Beam Electronic Height Gauges


- · Large base is lapped for easy movement
- Resolution: 0.0005"/.01mm
- · Large easy to read LCD
- · Presetable display
- Carbide tipped scriber



| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|------------|-----------|------------|------------|
| 54-106-020-0 | 20"/500mm | ± 0.0025" | \$1,080.17 | \$972.15 |
| 54-106-040-0 | 40"/1000mm | ± 0.0035" | \$4,968.95 | \$4,472.06 |



XTRA-VALUE CAL Digital Calipers

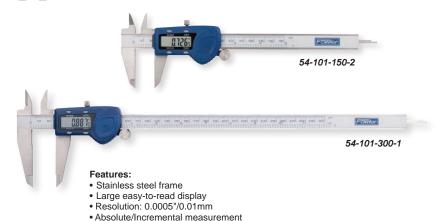

4-way measuring, inside, outside, depth and step
6" and 12" models include NIST Cert.

Includes fitted case

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|--|----------------|------------|-----------------|
| 54-101-150-2 | 6"/150mm | 0.001"/0.02mm | \$124.86 | \$113.61 |
| 54-101-600-1 | 6"/150mm - Large Display with Hold feature | 0.0015"/0.04mm | \$162.83 | \$146.54 |
| 54-101-300-1 | 12"/300mm | 0.0015"/0.04mm | \$249.22 | <i>\$223.36</i> |

XTRA-VALUE Plus Digital Caliper



Features:

- · IP54 protected against fluid and dust
- Range: 6"/150mm
- Accuracy: ± 0.001"/0.02mm
- Inch/Metric/Fraction reading: 0.0005"/0.01mm/ 1/128"
- · Heavy Duty frame for extra rigidity and wear resistance
- Super large, easy to read display
- · Includes fitted case

Part No. 54-103-006-0

Sale \$168,57
List Price \$194.70



IP67 Digital Calipers

With Smart Wireless Communication



Features:

- · IP67 protected against fluid and dust
- · Wireless connectivity for quick error free data collection
- · Supplied with NIST certification
- Heavy duty frame with 4-way measuring, inside, outside, depth and step
- Super large display
- Includes fitted case, extra battery tray and a 1" setting standard

| Part No. | Range | Accuracy | List Price | Sale Price |
|---------------|---------------|----------------|------------|------------|
| 54-100-554-BT | 0 - 4"/100mm | 0.001"/0.02mm | \$442.47 | \$402.64 |
| 54-100-556-BT | 0 - 6"/150mm | 0.001"/0.02mm | \$454.89 | \$410.90 |
| 54-100-512-BT | 0 - 12"/300mm | 0.0015"/0.04mm | \$589.95 | \$537.33 |

Digital Calipers



- Resolution: 0.0005"/0.01mm
- Absolute/Incremental Measurement
- · Stainless steel frame
- Direct Inch/Metric conversion
- · 4-way measuring, inside, outside, depth and step
- Wireless SPC data option
- · Includes fitted case

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|----------------------|----------------|------------|------------|
| 54-100-004-2 | 4"/100mm | 0.001"/0.02mm | \$264.16 | \$237.75 |
| 54-100-000-2 | 6"/150mm | 0.001"/0.02mm | \$298.68 | \$268.81 |
| 54-100-008-2 | 8"/200mm | 0.0015"/0.04mm | \$350.70 | \$315.62 |
| 54-100-112-2 | 12"/300mm | 0.0015"/0.04mm | \$457.24 | \$411.52 |
| Accessories | | | | |
| 54-115-100-0 | Wireless transmitter | r | \$255.32 | \$237.45 |



Premium Grade Dial Calipers



Features:

- Tough shockproof gearing with ultra smooth mechanism
- · 4-way measuring, inside, outside, depth and step
- · Solid stainless steel construction
- 0.100"/2mm range per revolution
- 0.001"/0.02mm reading dial face

| Part No. | Range | Dial Color | Accuracy | List Price | Sale Price |
|--------------|-----------|------------|-----------|------------|------------|
| 52-008-706-0 | 0 - 6" | White | ± 0.001" | \$183.91 | \$164.10 |
| 52-008-707-0 | 0 - 6" | Black | ± 0.001" | \$183.91 | \$164.10 |
| 52-008-708-0 | 0 - 8" | White | ± 0.0015" | \$220.84 | \$200.97 |
| 52-008-712-0 | 0 - 12" | White | ± 0.002" | \$296.94 | \$263.66 |
| Metric | | | | | |
| 52-008-709-0 | 0 - 150mm | Yellow | ± 0.02mm | \$189.62 | \$170.65 |

Dial Calipers



- · 4-way measuring for outside, inside, depths and steps
- Graduation: 0.001"
- Beam graduations: 0.100"
- · Hardened stainless steel throughout with lapped measuring faces
- · Satin chrome finished
- Covered rack
- Shockproof gearing

| Part No. | Range | Dial Color | Accuracy | List Price | Sale Price |
|--------------|---------|------------|-----------|------------|------------|
| 52-008-005-1 | 0 - 6" | Black | ± 0.001" | \$219.27 | \$195.12 |
| 52-008-007-1 | 0 - 6" | White | ± 0.001" | \$219.27 | \$195.12 |
| 52-008-008-1 | 0 - 8" | White | ± 0.0015" | \$309.33 | \$278.40 |
| 52-008-012-1 | 0 - 12" | White | ± 0.002" | \$527.56 | \$462.79 |
| | | | | | |

Inch & Metric Reading Dial Calipers



- Dial face reads in both inch (black) and metric (red)
- · Hardened stainless steel throughout
- · 4-way measuring
- · Raised sliding surface prevents wear and defacement of graduations
- · Covered stainless steel rack

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|-----------|----------|------------|------------|
| 52-030-006-1 | 6"/150mm | ± 0.001" | \$236.67 | \$208.27 |
| 52-030-012-1 | 12"/300mm | ± 0.002" | \$390.35 | \$343.50 |



With full length depth rod




· Satin chrome finish • Full length depth rod

· 0.50" internal measuring nibs on jaws

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|---------|----------|------------|------------|
| 52-008-018-0 | 0 - 18" | ± 0.003" | \$623.10 | \$548.99 |
| 52-008-024-0 | 0 - 24" | ± 0.003" | \$755.08 | \$661.79 |

XTRA-RANGE® Digital Calipers



- Absolute/Incremental measurement
- Preset mode includes offset size for ID measurements
- · Both sizes feature fine adjustment

| Part No. | Range | Accuracy | Jaw Depth | List Price | Sale Price |
|--------------|---------------|------------------|-----------|------------|------------|
| 54-100-312-0 | 0 - 12"/300mm | ± 0.002"/0.05mm | 3.5" | \$538.39 | \$483.99 |
| 54-100-024-1 | 0 - 24"/600mm | ± 0.003"/0.075mm | 4" | \$792.00 | \$711.18 |
| | | | | | |



Electronic Coolant Resistant Micrometers

For basic outside measurements with higher protection.



- Resolution: 0.00005"/0.001mm
- · Carbide measuring faces
- · Absolute & incremental modes
- Ratchet thimble
- Automatic switch off
- Free ball attachment included
- Sizes over 1"/25mm include a calibration standard

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|------------------------------|--------------------|------------|------------|
| 54-860-001-1 | 0 - 1"/0 - 25mm | ± 0.00016"/0.004mm | \$289.78 | \$231.83 |
| 54-860-002-1 | 1 - 2"/25 - 50mm w/standard | ± 0.00016"/0.004mm | \$335.41 | \$268.33 |
| 54-860-003-1 | 2 - 3"/50 - 75mm w/standard | ± 0.0002"/0.005mm | \$365.75 | \$292.61 |
| 54-860-004-1 | 3 - 4"/75 - 100mm w/standard | ± 0.0002"/0.005mm | \$424.63 | \$339.70 |
| Set | | | | |
| 54-860-103-1 | 0 - 3"/0 - 75mm w/standard | | \$952.84 | \$762.27 |

XTRA-VALUE | | Electronic Micrometers



- Resolution: 0.00005"/0.001mm
- Carbide measuring faces
- Absolute and incremental modes
- Ratchet thimble
- Free ball attachment included
- Sizes over 1"/25mm include a calibration standard



XTRA-MIC PLUS Electronic Micrometers



Features:

- · IP54 protected against fluid and dust
- · Corrosive resistant ratchet thimble (anodized aluminum)
- Super large LCD display, 14mm height
- Resolution: 0.00005"/0.001mm
- · Carbide tipped anvil and spindle
- Sizes over 1"/25mm include a calibration standard
- · Includes fitted case and two ball attachments

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|-------------------|------------------|------------|------------|
| 54-880-001-0 | 0 - 1"/0 - 25mm | 0.00016"/0.004mm | \$324.46 | \$243.34 |
| 54-880-002-0 | 1 - 2"/25 - 50mm | 0.00016"/0.004mm | \$373.96 | \$280.47 |
| 54-880-003-0 | 2 - 3"/50 - 75mm | 0.0002"/0.005mm | \$399.76 | \$299.82 |
| 54-880-004-0 | 3 - 4"/75 - 100mm | 0.0002"/0.005mm | \$458.39 | \$343.79 |
| Set | | | | |
| 54-880-103-0 | 0 - 3"/0 - 75mm | | \$1,032.01 | \$774.01 |
| | | | | |

0 - 1" BLUETOOTH Micrometer Kit



Part No. 54-860-001-BT



List \$363.53

Carbide measuring faces
Absolute & incremental modes

Electronic IP65 Thread Micrometer

For accurate pitch diameter measurements.



Features:

- · IP65 protected against fluid and dust
- Thread range: 44 3.5 TPI/0.6 7mm
- Accuracy: ± 0.00008"/0.002mm
- 60° measuring anvils
- Absolute and incremental measuring mode
- Resolution: 0.00005"/0.001mm
- Friction thimble

| Part No. | Range | Thread Range | Accuracy | List Price | Sale Price |
|--------------|--------------------|------------------------|--------------------|------------|------------|
| 54-219-001-0 | 0 - 1"/0 - 25mm | 64 - 5 TPI/0.4 - 5mm | ± 0.00008"/0.002mm | \$659.06 | \$599.75 |
| 54-219-002-0 | 1" - 2"/25 - 50mm | 44 - 3.5 TPI/0.6 - 7mm | ± 0.00008"/0.002mm | \$693.31 | \$621.62 |
| 54-219-003-0 | 2" - 3"/50 - 75mm | 24 - 3.5 TPI/1 - 7mm | ± 0.00008"/0.002mm | \$704.03 | \$640.58 |
| 54-219-004-0 | 3" - 4"/75 - 100mm | 24 - 3.5 TPI/1 - 7mm | ± 0.00012"/0.003mm | \$734.16 | \$667.98 |
| | | | | | |

Vernier Thread Micrometers



- 60° measuring anvils
- Graduation: 0.001"
- Ratchet thimble
- Sizes over 1" include standard

| | 2 |
|---|--------|
| S | A]CA |
| | AMEF |
| | ĮΞ |
| | I E |
| | LS NOI |
| | 001 |

| Part No. | Range | Thread Range | Accuracy | List Price | Sale Price |
|--------------|---------|------------------------|----------|------------|------------|
| 52-219-001-1 | 0 - 1" | 64 - 5 TPI/0.4 - 5mm | 0.00016" | \$230.33 | \$209.60 |
| 52-219-002-1 | 1" - 2" | 44 - 3.5 TPI/0.6 - 7mm | 0.00016" | \$253.57 | \$230.74 |
| 52-219-003-1 | 2" - 3" | 24 - 3.5 TPI/1 - 7mm | 0.0002" | \$295.69 | \$269.08 |
| 52-219-004-1 | 3" - 4" | 24 - 3.5 TPI/1 - 7mm | 0.0002" | \$320.19 | \$291.37 |
| | | | | | |

Vernier Inch Blade Micrometers

Use blade micrometers to measure the outside diameter of workpieces which have narrow grooves, "T" slots and other dimensions.



Features:

- · Anvil & spindle hardened & precision ground with microlap finish on ends
- Non-rotating spindle
- Ratchet thimble
- Graduation: 0.0001"
- Blade thickness = 0.030"; blade width = 0.256"; blade penetration = 0.315"
- Sizes over 1" include a standard

| Order No. | Range | Accuracy | List Price | Sale Price |
|--------------|---------|----------|------------|------------|
| 52-246-001-1 | 0 - 1" | 0.00016" | \$552.70 | \$442.17 |
| 52-246-002-1 | 1" - 2" | 0.00016" | \$601.72 | \$481.39 |
| 52-246-003-1 | 2" - 3" | 0.0002" | \$628.24 | \$502.61 |
| 52-246-004-1 | 3" - 4" | 0.0002" | \$640.25 | \$512.22 |
| 52-246-005-1 | 4" - 5" | 0.00024" | \$682.89 | \$546.31 |
| 52-246-006-1 | 5" - 6" | 0.00024" | \$724.91 | \$579.95 |
| 52-246-007-1 | 6" - 7" | 0.00028" | \$766.94 | \$613.56 |

Interchangeable Anvil Micrometers

Very popular in machine and auto repair and for all other applications requiring a versatile micrometer. Each micrometer is equipped with a series of easily interchangeable anvils to fulfill the ranges listed.



- Ratchet thimble
- Microfine graduations on satin chrome finish for easy reading
- Each anvil fitted with an adjusting collar to set the overall dimension
- · Carbide tipped measuring faces
- · Positive lever locking clamp

| 52-401-222-1 6" - 12" 0.0001" 0.00016" \$965.27 \$772.2 | Order No. | Range | Graduation | Accuracy | List Price | Sale Price |
|--|--------------|-----------|------------|----------|------------|------------|
| | 52-401-221-1 | 0 - 6" | 0.0001" | 0.00016" | \$657.27 | \$525.84 |
| 52-401-204-1 12" - 16" 0.001" 0.0002" \$1,158.39 \$926.7 | 52-401-222-1 | 6" - 12" | 0.0001" | 0.00016" | \$965.27 | \$772.22 |
| | 52-401-204-1 | 12" - 16" | 0.001" | 0.0002" | \$1,158.39 | \$926.72 |
| 52-401-205-1 16" - 20" 0.001" 0.0002" \$1,351.28 \$1,081.0 | 52-401-205-1 | 16" - 20" | 0.001" | 0.0002" | \$1,351.28 | \$1,081.02 |




Outside Vernier Micrometers



- Diameter of measuring faces: 0.256"
- · Anvil & spindle hardened and precision ground with microlap finish on tips
- Sizes over 1"/25mm include a standard

| | ange | Accuracy | Thimble | List Price 🛚 🥞 | ale Price |
|-----------------------|--------|----------|----------|----------------|-----------|
| 52-253-001-1 0 |) - 1" | ± 0.001" | Friction | \$76.88 | \$69.97 |
| 52-253-101-1 0 |) - 1" | ± 0.001" | Ratchet | \$76.88 | \$69.97 |
| 52-253-002-1 1 | " - 2" | ± 0.001" | Friction | \$91.37 | \$83.14 |
| 52-253-102-1 1 | " - 2" | ± 0.001" | Ratchet | \$91.37 | \$83.14 |
| 52-253-003-1 2 | " - 3" | ± 0.001" | Ratchet | \$106.26 | \$88.50 |
| 52-253-004-1 3 | " - 4" | ± 0.001" | Ratchet | \$124.16 | \$101.41 |
| 52-253-005-1 4 | " - 5" | ± 0.001" | Ratchet | \$138.64 | \$116.16 |
| 52-253-006-1 5 | " - 6" | ± 0.001" | Ratchet | \$153.55 | \$129.07 |

Outside Vernier Micrometer Set

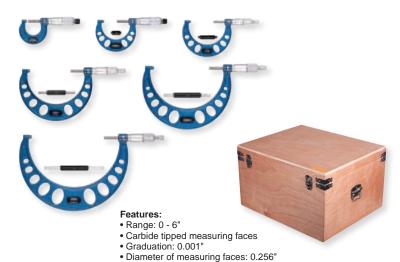

Part No. 52-253-600-1



• Sizes over 1"/25mm include a standard



· Anvil & spindle hardened and precision ground with microlap finish on tips

Outside Vernier Micrometers



52-215-003-1

- Microfine graduations on satin chrome finish and carbide tipped measuring faces
- Diameter of measuring faces: 0.256"
- Graduation: 0.0001"
- Flatness: 0.00003"
- Spindle thread hardened, ground and lapped for ultimate accuracy
- · Includes a wrench and case
- Sizes over 1"/25mm include a standard

| Part No. | Range | Accuracy | Thimble | List Price | Sale Price |
|--------------|-----------------|---|------------|------------|------------|
| 52-240-001-1 | 0 - 1" | ± 0.00016" | \$91.37 | \$78.31 | |
| 52-240-101-1 | 0 - 1" | ± 0.00016" | \$91.37 | \$78.31 | |
| 52-240-002-1 | 1" - 2" | ± 0.00016" | \$106.26 | \$91.08 | |
| 52-240-102-1 | 1" - 2" | 1" - 2" ± 0.00016" Ratchet | | | \$91.08 |
| 52-240-003-1 | 2" - 3" | 2" - 3" ± 0.0002" Ratchet | | | \$106.42 |
| 52-240-004-1 | 3" - 4" | ± 0.0002" | Ratchet | \$138.64 | \$118.83 |
| 52-240-005-1 | 4" - 5" | ± 0.00024" | Ratchet | \$153.55 | \$131.61 |
| 52-240-006-1 | 5" - 6" | ± 0.00024" | Ratchet | \$168.25 | \$144.20 |
| 52-240-007-1 | 6" - 7" | 6" - 7" ± 0.00028" Ratchet | | | \$156.80 |
| 52-240-008-1 | 7" - 8" | ± 0.00028" | \$215.29 | \$184.54 | |
| 52-240-009-1 | 8" - 9" | ± 0.00032" | \$244.69 | \$209.73 | |
| 52-240-010-1 | 9" - 10" | ± 0.00032" | \$277.50 | \$237.85 | |
| 52-240-011-1 | 10" - 11" | 10" - 11" ± 0.00036" Ratchet | | | \$263.03 |
| 52-240-012-1 | 11" - 12" | 11" - 12" ± 0.00036" Ratchet | | | \$288.22 |
| Sets | | | | | |
| 52-215-003-1 | 0 - 3" with sta | 0 - 3" with standards and fitted shop hardened case | | | \$272.90 |
| 52-215-004-1 | 0 - 4" with sta | 0 - 4" with standards and fitted shop hardened case | | | \$387.20 |
| 52-215-006-1 | 0 - 6" with sta | 0 - 6" with standards and fitted shop hardened case | | | \$645.33 |
| 52-215-012-1 | 0 - 12" with s | 0 - 12" with standards and fitted wooden case | | | \$2,012.09 |
| 52-215-612-1 | 6 - 12" with s | tandards and fitted w | ooden case | \$1,548.64 | \$1,327.40 |



Digit Counter Micrometers



52-224-001-1

- Carbide tipped measuring faces
- Sizes over 1"/25mm include a standard
- Includes case

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|---------------------|-----------------------------|------------|------------|
| 52-224-001-1 | 0 - 1" | 0.00016" | \$249.59 | \$194.52 |
| 52-224-002-1 | 1" - 2" | 0.00016" | \$262.16 | \$181.61 |
| 52-224-003-1 | 2" - 3" | 0.0002" | \$298.57 | \$206.87 |
| 52-224-004-1 | 3" - 4" | 0.0002" | \$328.61 | \$227.71 |
| 52-224-005-1 | 4" - 5" | 0.00024" | \$347.76 | \$316.46 |
| 52-224-006-1 | 5" - 6" | 0.00024" | \$363.51 | \$330.80 |
| Sets | | | | |
| 52-224-103-0 | 0 - 3" set (set fir | nished in grey enamel) | \$787.73 | \$545.76 |
| 52-224-104-0 | 0 - 4" set (set fi | nished in grey enamel) | \$1,117.17 | \$773.84 |
| 52-224-220-0 | 0 - 75mm set (s | et finished in grey enamel) | \$829.47 | \$574.52 |
| | | | | |

Micrometer Stands



- · Unique locking system adjusts micrometer stand to any position for perfect use and viewing
- Stand folds for storage

XTRA MAG

- · Holds standard 0-12" micrometers firmly to metal surfaces
- · Use at machine centers, assembly and inspection stations, steel tables and shelves
- · V-bottom for mounting on cylindrical surfaces
- On/Off magnet switch
- Base is 2.30" L x 1.20" W x 3.50" H



Micrometer not included



IP54 Electronic Depth Micrometer



Features:

- · IP54 protected against fluid and dust
- Range: 0 6"/150 mm
- Resolution: 0.00005"/0.001mm
- · Base surface hardened
- and microlapped to 0.00008" flatness
- Rod diameter: 0.176"
- · Includes fitted case

Part No. 54-225-456-0



List Price \$569.51

Vernier Depth Micrometers



| Part No. | Range | Graduation | Accuracy | Base Size | List Price | Sale Price |
|--------------|---------|------------|----------|-----------|------------|------------|
| 52-225-110-0 | 0 - 4" | 0.001" | 0.0002" | 2.5" | \$296.65 | \$269.95 |
| 52-225-112-0 | 0 - 6" | 0.001" | 0.0002" | 2.5" | \$350.32 | \$318.79 |
| 52-225-114-0 | 0 - 4" | 0.001" | 0.0002" | 4" | \$320.50 | \$291.66 |
| 52-225-116-0 | 0 - 6" | 0.001" | 0.0002" | 4" | \$375.02 | \$341.27 |
| 52-225-035-1 | 0 - 12" | 0.001" | 0.00028" | 4" | \$754.93 | \$687.00 |



Horizontal & Vertical Test Indicators

Features:

- Super smooth jeweled movement
- · Smooth bezel adjustment for easy zero setting
- · Solid brass anti-magnetic housing
- 0.080" and 0.120" carbide ball contact points (0.040" steel ball)
- 0.060" range with auto reverse and rev. counter
- · Easy to read tilted dial









52-562-005-0

52-562-001-0 52-562-002-BD

| Part No. | Graduation | Dial Size | Dial Reading | List Price | Sale Price |
|---------------|------------|-----------|--------------|------------|------------|
| Horizontal | | | | | |
| 52-562-001-0 | 0.0005" | 1-1/2" | 0 - 15 - 0 | \$284.71 | \$259.09 |
| 52-562-001-BD | 0.0005" | 1-1/2" | 0 - 15 - 0 | \$284.71 | \$259.09 |
| 52-562-002-0 | 0.0005" | 1" | 0 - 15 - 0 | \$284.71 | \$259.09 |
| 52-562-002-BD | 0.0005" | 1-1/2" | 0 - 15 - 0 | \$284.71 | \$259.09 |
| 52-562-003-0 | 0.001" | 1" | 0 - 15 - 0 | \$284.71 | \$259.09 |
| 52-562-008-0 | 0.01mm | 38mm | 0 - 40 - 0 | \$284.71 | \$259.09 |
| Vertical | | | | | |
| 52-562-004-0 | 0.0005" | 1-1/2" | 0 - 15 - 0 | \$334.03 | \$260.37 |
| 52-562-005-0 | 0.0005" | 1" | 0 - 15 - 0 | \$334.03 | \$260.37 |

Test Indicators

All Fowler Test Indicators include bi-directional constant clockwise rotation, automatic reversal, three dovetail mountings, jeweled movement, two dovetail clamps and a molded case.

0.001" 0.0005" Reading







| Ш | NC |
|---|------|
| C | ICA |
| | AMEF |
| | Ŧ |
| | NON |
| | LS |
| | 8 |

| Part | Dial | Total | Dial | | Dial | Point | List | Sale |
|--------------|-------|--------|---------|------------|----------|--------|----------|----------|
| No. | Color | Range | Reading | Graduation | Diameter | Length | Price | Price |
| 52-562-774-0 | white | 0.030" | 0-15-0 | 0.001" | 1" | 1/2" | \$267.69 | \$243.59 |
| 52-562-778-0 | black | 0.030" | 0-15-0 | 0.0005" | 1" | 1/2" | \$284.52 | \$258.91 |
| 52-562-775-0 | white | 0.030" | 0-15-0 | 0.0005" | 1" | 1/2" | \$284.52 | \$258.91 |
| 52-562-776-0 | white | 0.030" | 0-15-0 | 0.0005" | 1-1/2" | 1/2" | \$297.49 | \$270.72 |
| 52-562-780-0 | black | 0.030" | 0-15-0 | 0.0005" | 1-1/2" | 1/2" | \$297.49 | \$270.72 |

Features:

· AGD Group 2 specifications

Premium Dial Indicators

- Jeweled movement
- Tolerance markers
- Solid steel housing
- Carbide contact point
- Includes NIST Certification



| Part No. | Range | Graduation | Reading | Balanced Reading | Dial Color | List Price | Sale Price |
|--------------|--------|------------|---------|-------------------------|------------|------------|------------|
| 52-520-135-0 | 0.05" | 0.0001" | 0 - 10 | 0 - 5 - 0 | White | \$382.73 | \$290.40 |
| 52-520-105-0 | 0.50" | 0.001" | 0 - 100 | 0 - 50 - 0 | White | \$189.10 | \$144.07 |
| 52-520-110-1 | 1" | 0.001" | 0 - 100 | _ | Black | \$199.95 | \$159.95 |
| 52-520-110-2 | 1" | 0.001" | 0 - 100 | _ | White | \$199.95 | \$159.95 |
| 52-520-120-0 | 2" | 0.001" | 0 - 100 | _ | White | \$318.78 | \$258.13 |
| 52-520-125-0 | 0.250" | 0.0005" | 0 - 100 | _ | White | \$263.84 | \$201.03 |
| 52-520-129-0 | 1" | 0.0005" | 0 - 50 | 0 - 25 - 0 | White | \$241.70 | \$184.16 |
| 52-520-300-0 | 10mm | 0.01mm | 0 - 100 | 0 - 50 - 0 | White | \$228.29 | \$173.94 |
| 52-520-500-0 | 25mm | 0.01mm | 0 - 100 | 0 - 50 - 0 | White | \$304.31 | \$221.25 |

Premium IP54 Shockproof Dial Indicators

Features:

- · IP54 protected against fluid and dust
- · Includes both center lug back and flat back
- Steel housing
- · Sealed plunger, dust-cap and back plate
- Carbide contact point
- 0 100 dial reading with revolution counter
- Includes NIST Certification



| <i>52-520-460-0 5</i> | ź |
|-----------------------|---|
|-----------------------|---|

| Part No. | Range | Graduation | Reading | Contact Point | List Price | Sale Price |
|--------------|-------|------------|---------|--------------------|------------|------------|
| 52-520-460-0 | 1" | 0.001" | 0 - 100 | 4 - 48 (3/8" stem) | \$216.99 | \$175.16 |
| 52-520-465-0 | 1" | 0.001" | 0 - 100 | 4 - 48 (3/8" stem) | \$216.99 | \$175.16 |

Dial Indicator

Features:

- Range: 1"
- · AGD Group 2 specifications
- Graduations: 0.001"
- Continuous reading: 0 100
- Supplied with lug back for positioning through 90° increments
- · Carbide tipped contact points
- · Microfine graduations in black for continuous readings and red for balanced readings

Part No. 52-520-110-0



List Price \$160.03



INDI-XIIIIE Electronic Indicators



| Part No. | Range | List Price | Sale Price |
|--------------|--------------|------------|------------|
| 54-520-255-0 | 0.50"/12.5mm | \$253.60 | \$193.23 |
| 54-520-250-0 | 1"/25mm | \$272.83 | \$221.25 |
| 54-520-260-0 | 1"/25mm | \$276.96 | \$227.11 |

INDI-X BT Electronic Indicators

With Smart Wireless Communication



· Absolute/incremental reading

· Floating zero

- Wireless communication to most phones and tablets
- Resolution 0.00005"/0.001mm
- · Economical bluetooth option
- Includes lifting hook, ceramic ball contact point, 2 specialty contact points (spline and point), NIST cert., lug and flat backs

| Part No. | Range | Accuracy | List Price | Sale Price |
|--------------|------------------|------------------|------------|------------|
| 54-520-280-0 | 0 - 1"/25mm | 0.00035"/0.008mm | \$380.11 | \$323.10 |
| 54-520-285-0 | 0 - 0.50"/12.5mm | 0.00030"/0.007mm | \$367.57 | \$312.44 |

Dial Cylinder Bore Gauges

2-point bore measuring.

Features:

- Carbide Anvils
- Easy-to-read
- · Great value
- Graduation: 0.0005", 0.0001" or 0.01mm
- · Insulated grip
- 9.5" depth above 1.5"
- · Chrome plated handle



| Part No. | Range | Graduation | List Price | Sale Price |
|--------------|--------------------------|-----------------------------|------------|------------|
| 52-646-100-0 | 0.7" - 1.5" | 0.0005" | \$360.96 | \$281.31 |
| 52-646-300-0 | 2" - 6" | 0.0005" | \$298.43 | \$262.64 |
| 52-646-400-0 | 1.4" - 6" | 0.0005" | \$453.59 | \$353.61 |
| 52-646-500-0 | 1.4" - 6" | 0.0001" | \$588.89 | \$518.96 |
| 52-646-220-0 | 35 - 60mm | 0.01mm | \$516.54 | \$455.15 |
| Extensions | | | | |
| 52-646-450-0 | 20" depth extension *No | t for use with 52-646-100-0 | \$188.39 | \$171.43 |
| 52-646-475-0 | 40" depth extension *No. | t for use with 52-646-100-0 | \$242.29 | \$220.49 |

Internal & External Electronic Caliper Gauges





- Accuracy: ± 0.0008"/± 0.02mm
- Resolution: 0.0002"/0.005mm
- Analog scale for reversal point indication
- Large, LCD display



- Preset capability
- · Absolute and incremental measurements modes
- · High-impact, aircraft aluminum case
- Rugged housing

| | | Dimensions f | for Internal Ca | lipers |
|-------|------|--------------|-----------------|---------|
| | | Metric | Inch | L |
| | T | 5-15mm | 0.2-0.6" | 20r |
| | - | 5-25mm | 0.2-1.0" | 35r |
| | | 10-30mm | 0.4-1.2" | 55r |
| S_ | I_ H | 20-40mm | 0.8-1.6" | 80n |
| 17.00 | | 30-50mm | 1.2-2.0" | 80n |
| | | | | |
| | | | or External Ca | alipers |
| | | Metric | Inch | L |
| | 7 | 0-10mm | 0-0.4" | 40n |
| | _ | 0-20mm | 0-0.8" | 80n |
| | | 10-30mm | 0.4-1.2" | 80r |
| | | 20-40mm | 0.8-1.6" | 8∩r |

| Metric | Inch | L | S | Н | Tip Radius | |
|----------------------------------|----------|------|-------|-------|------------|--|
| 5-15mm | 0.2-0.6" | 20mm | 1.0mm | 1.5mm | 0.3mm | |
| 5-25mm | 0.2-1.0" | 35mm | 1mm | 1.5mm | 0.3mm | |
| 10-30mm | 0.4-1.2" | 55mm | 2mm | 3.5mm | 0.5mm | |
| 20-40mm | 0.8-1.6" | 80mm | 3mm | 6.5mm | 0.5mm | |
| 30-50mm | 1.2-2.0" | 80mm | 3mm | 8.5mm | 0.5mm | |
| | | | | | | |
| Dimensions for External Calipers | | | | | | |

| Metric | Inch | L | S | Н | Tip Radius |
|---------|----------|------|-------|------|------------|
| 0-10mm | 0-0.4" | 40mm | 3mm | 8mm | 0.5mm |
| 0-20mm | 0-0.8" | 80mm | 6.5mm | 25mm | 0.75mm |
| 10-30mm | 0.4-1.2" | 80mm | 6.5mm | 25mm | 0.75mm |
| 20-40mm | 0.8-1.6" | 80mm | 6.5mm | 25mm | 0.75mm |
| 30-50mm | 1.2-2.0" | 80mm | 6.5mm | 25mm | 0.75mm |

| Part No. | Range | List Price | Sale Price |
|-------------------------|--------------------------|------------|------------|
| Internal Caliper Gauges | | | |
| 54-554-611-0 | 0.200" - 0.590"/5 - 15mm | \$471.68 | \$421.44 |
| 54-554-622-0 | 0.200" - 1"/5 - 25mm | \$505.75 | \$453.05 |
| 54-554-623-0 | 0.400" - 1.2"/10 - 30mm | \$529.35 | \$481.71 |
| 54-554-624-0 | 0.790" - 1.6"/20 - 40mm | \$529.35 | \$481.71 |
| 54-554-625-0 | 1.2" - 2"/30 - 50mm | \$529.35 | \$481.71 |
| External Caliper Gauges | | | |
| 54-554-711-0 | 0 - 0.400"/0 - 10mm | \$471.68 | \$421.44 |
| 54-554-722-0 | 0 - 0.790"/0 - 20mm | \$505.75 | \$453.05 |
| 54-554-723-0 | 0.4" - 1.2"/10 - 30mm | \$529.35 | \$481.71 |
| 54-554-724-0 | 0.790" - 1.6"/20 - 40mm | \$529.35 | \$481.71 |
| 54-554-725-0 | 1.2" - 2"/30 - 50mm | \$529.35 | \$481.71 |

Electronic Edge Finders



- · Six equally spaced light ports provide visibility at any angle
- · Edge finder lights instantly when stylus touches work edge
- Repeatability: 0.0002"
- · Works on any conductive metal

Along with light indication, model 54-575-650-0 emits an audible "beep" at time of contact with electrically conductive metal.

| Part No. | Stylus | Shank | Audible | List Price | Sale Price |
|--------------|--------|-------|---------|------------|------------|
| 54-575-600-0 | 0.200" | 1/2" | NO | \$92.92 | \$84.56 |
| 54-575-625-0 | 0.200" | 1/2" | NO | \$320.82 | \$291.95 |
| 54-575-650-0 | 0.400" | 3/4" | YES | \$320.82 | \$291.95 |



7-CHECK (5) PLUSD Z-Axis Tool Setter



Features:

- · Supplied with zero reference setting block
- · IP65 protected against fluid and dust
- · 4 magnets embedded into base
- 2" default setting height
- · Steel contact surface with 0.0002" flatness
- Resolution: 0.00005"/0.001mm
- Repeatability: 0.00015"/0.004mm Accuracy: 0.0001"/0.003mm
- · Includes a rugged, aluminum fitted case

Display lights when ZERO reference is reached

Part No. 54-188-200-0



List Price \$284.27

The mini-MAG Protractor provides instant 360° digital inclination display of any angle.

Features:

- Accuracy: ± 0.2°
- Resolution: 0.05°
- Repeatability: 0.05°
- Measuring range: 360°
- · Embedded magnets
- · Display automatically inverts
- Dimensions: 2.375" x 1.375" x 2.375"
- Hold feature
- . Battery Life: up to 250 hrs.



Display inverts for easy reading!





Part No. 54-422-450-1



List Price \$259.92



1-2-3 & 2-4-6 Blocks

Useful in layout and grinding work.

Features:

- 23 holes for easy clamping
- · Sold in pairs
- Hardened 56 60 HRC
- 1-2-3 blocks have 5 threaded holes, 3/8" 16
- 2-4-6 blocks have 5 threaded holes, 5/8" - 11



| Part No. | Description | Accuracy | List Price | Salle Prilee |
|--------------|--------------|--------------|------------|--------------|
| 52-439-031-0 | 1-2-3 Blocks | ± 0.0002"/1" | \$80.54 | \$64.43 |
| 52-439-246-0 | 2-4-6 Blocks | ± 0.0003"/1" | \$375.90 | \$300.72 |
| | | | | |

Parallel Set

Features:

- 2 each of 1/2", 5/8", 3/4", 7/8", 1", 1-1/8", 1-1/4", 1-3/8", 1-1/2" & 1-5/8" heights
- Absolute heights are nominal
- Hardness: 50 HRC, 6" length and 1/8" thickness
- Parallelism: ± 0.0008"
- Paired in height: ± 0.001"



Part No. 52-437-000-0



List Price \$577.48

Toolmaker's Vise

Toolmaker's Vise makes precision holding possible for inspection, precision jig boring, milling and grinding.



Features:

- Maximum opening: 2.48"
- Dimensions: 6.1" x 1.9" x 2.0"
- Features solid base and front jaw construction
- Parallelism and squareness accuracy: 0.0004"
- Clamping slots on the bottom of the base allow for easily affixing to angle plates, vises, etc.

Part No. 52-466-000-1



List Price \$425.92

Bolt Cutters High Tensile, Tubular Handles

High tensile - for cutting hard materials up to 50HRC. Centre cut, strap adjusted bolt cutters with lightweight tubular handles that do not compromise strength – every pound of force applied is amplified to produce 80lbs (36kg) of force between the jaws. To maximize safety, the built in stops will yield rather than break, while the drop forged jaws are machined to precise specifications for a resilient body and rigid cutting edge.



| Part No. | Total Length | Max Cutting Capacity | Pack QTY | List Price |
|----------|--------------|----------------------|----------|------------|
| ETBC14 | 355mm (14") | 5mm (3/16") | 20 | \$25.03 |
| ETBC18 | 460mm (18") | 6.4mm (1/4") | 10 | \$29.51 |
| ETBC24 | 610mm (24") | 7.9mm (5/16") | 8 | \$39.87 |
| ETBC30 | 762mm (30") | 9.5mm (3/8") | 5 | \$51.46 |
| ETBC36 | 915mm (36") | 11.1mm (7/16") | 4 | \$65.91 |

End Cut Bolt Cutter

Pincer movement makes the bolt cutter ideal for cutting in restricted areas or where a side cut is difficult, eg. when cutting off bolt heads. Jaws are drop forged and machined to precise specifications for a resilient body and rigid cutting edge. Handles are solid forged and incorporate safety stops that will yield rather than break.



| Part No. | Total Length | Max Cutting Capacity | Pack QTY | List Price |
|----------|--------------|----------------------|----------|------------|
| EBC-EC24 | 600mm (24") | 7.9mm (5/16") | 1 | \$69.18 |

Straight Jaw Locking Pliers

Straight haws are ideal for use with flat, square and hex workpieces. Ideal for welding, HVAC, plumbing, automotive, electrical, and woodworking projects.



| Part No. | Size | Max Jaw Capacity | Box QTY | List Price |
|----------|-------------|------------------|---------|------------|
| E7R | 175mm (7") | 34mm (1.3") | 5 | \$17.55 |
| E10R | 250mm (10") | 45mm (1.8") | 5 | \$16.67 |
| | | | | |

Curved Jaw Locking Pliers

Designed for gripping and clamping round surfaces.



| Part No. | Size | Max Jaw Capacity | Box QTY | List Price |
|----------|-------------|------------------|---------|------------|
| E10CR | 250mm (10") | 45mm (1.8") | 5 | \$19.38 |

Curved Jaw Locking Pliers With Wire Cutters

Designed for gripping and clamping round surfaces. Incorporates a wire cutter.



| Part No. | Size | Max Jaw Capacity | Box QTY | List Price |
|----------|-------------|------------------|---------|------------|
| E5WR | 125mm (5") | 33mm (1¼") | 5 | \$14.14 |
| E7WR | 175mm (7") | 34mm (1½") | 5 | \$16.24 |
| E10WR | 250mm (10") | 45mm (1.8") | 5 | \$18.26 |

Locking C-Clamp With Swivel Pads

The wide opening jaws are designed to reach around and grip awkward shapes while the swivel pad protects delicate workpieces from damage. Provide a deep reach.



| Part No. | Size | Max Jaw Capacity | Box QTY | List Price |
|----------|-------------|------------------|---------|------------|
| E6SP | 150mm (6") | 44mm (1.7") | 5 | \$18.60 |
| E11SP | 275mm (11") | 80mm (3.1") | 5 | \$29.22 |
| | ` , | , , | | |

Profile Projector Retrofit

Simple, plug and play



Improve your optical comparator functionality and accuracy!

your comparator. Comprehensive reporting including dimensioned drawing, SPC and EXCEL™ compatible first article inspection

Compatible comparator types:

- Mitutoyo • Tesa

Upgrades include:

- 22" touch screen
- Intel NUC mini PC Windows 10 OS
- Fusion FT2-E metrology software
- Optical edge sensor remove operator influence
- · Fast data point acquisition
- · Entire system is plug and play
- · Best fitting of profile data to imported DXF files No Overlays!



Starting from: **\$ 4,931.**00

Contact Eclipse for more details! 1-800-260-2124



TOOLS NORTH AMERICA INC

442 Millen Road Unit 9, Stoney Creek, ON L8E 6H2

1-800-260-2124

1-800-260-1410

https://www.bowersgroup.co.uk/ca/













